



SOUND TRANSMISSION LOSS TEST REPORT NO. TL14-215 revision 1

CLIENT: **CEMCO**
263 N Covina Lane
City of Industry, CA 91744
TEST DATE: 29 April 2014

Page 1 of 3
28 May 2014

INTRODUCTION

The test was performed in accordance with ASTM E 90-09, *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions* and ASTM E2235-04^{E1}, *Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods*. Copies of the test standard are available at www.astm.org. The test chamber source and receiving room volumes are 204 and 148.4 cubic meters respectively. Western Electro-Acoustic Laboratory is accredited by the United States Department of Commerce, National Institute of Standards and Technology under the National Voluntary Accreditation Program (NVLAP) Lab Code 100256-0 for this test procedure. This test report relates only to the item(s) tested. This report must not be used to claim product certification, approval, or endorsement by WEAL, NVLAP, NIST or any agency of the federal government.

DESCRIPTION OF TEST SPECIMEN

The test specimen was a wall assembly constructed from metal studs, resilient channel, and Type X gypsum board. The metal studs were 92.1 mm (3-5/8 inch) Cemco 20 mil studs and were spaced at 610 mm (24 inches) O.C. The sill and head tracks were also 92.1 mm (3-5/8 inch) Cemco 20 mil metal. The frame was isolated from the test opening with 6.4 mm (1/4 inch) neoprene pads. On the center joint of the wall, two studs were installed back to back. Full width R-13 un-faced fiberglass batts, 89 mm (3-1/2 inch) thick, were installed in the stud spaces. On the source room side, one layer of 15.9 mm (5/8 inch) thick Type X gypsum board was screwed to the studs at 203 mm (8 inches) O.C. around the perimeter and 305 mm (12 inches) O.C. in the field using 31.8 mm (1-1/4 inch) drywall screws. The gypsum board was oriented vertically and a FAS 093X Fire Rated Control Joint was installed in between the two drywall sheets. A layer of intumescent tape was attached to the control joint. Westpac Materials Fast Set Lite 5 joint compound was used to seal the joint. On the receiving room side, Cemco 18 mil modified RC-1 single leg resilient channels were screwed to the studs horizontally at 610 mm (24 inches) O.C. The slots on the channel were 52.4 mm (2-1/16 inches) long separated by 23.8 mm (15/16 inch) of steel. The top four channels were oriented with the resilient leg above the screw leg and the bottom channel was oriented with the resilient leg below the screw leg. The center of the top channel was 3 inches (76.2 mm) below the top of the wall and the center of the bottom channel was 76.2 mm (3 inches) above the bottom of the wall. Two layers of 15.9 mm (5/8 inch) thick Type X gypsum board were screwed to the resilient channel at 305 mm (12 inches) O.C. using 25.4 mm (1 inch) drywall screws on the first layer and 41.3 mm (1-5/8 inch) drywall screws on the second layer. The gypsum board was oriented vertically. On both sides, the perimeters were sealed with a bead of caulking and metal foil tape. All screw heads were covered with metal foil tape. The overall dimensions of the wall assembly were 2.44 m (96 inches) wide by 2.44 m (96 inches) high by 152 mm (6 inches) thick. The overall weight of the assembly was estimated to be 225 kg (496 lbs.) for a calculated surface density of 7.75 kg/m² (37.8 lbs./ft²).

SOUND TRANSMISSION LOSS TEST REPORT NO. TL14-215 revision 1

CLIENT: CEMCO
TEST DATE: 29 April 2014


Page 2 of 3
28 May 2014

RESULTS OF THE MEASUREMENTS

One-third octave band sound transmission loss values are plotted and tabulated on the attached sheet. ASTM minimum volume requirements are met at 80 Hz and above. The Outdoor-Indoor Transmission Class rating determined in accordance with ASTM E 1332-10a was OITC-38. The Sound Transmission Class rating determined in accordance with ASTM E 413-10 was STC-57.

Approved:

Respectfully submitted,
Western Electro-Acoustic Laboratory



Gary E. Mange
Laboratory Director




Raul Martinez
Acoustical Test Technician

WESTERN ELECTRO-ACOUSTIC LABORATORY

Report No. TL14-215

Page 3 of 3

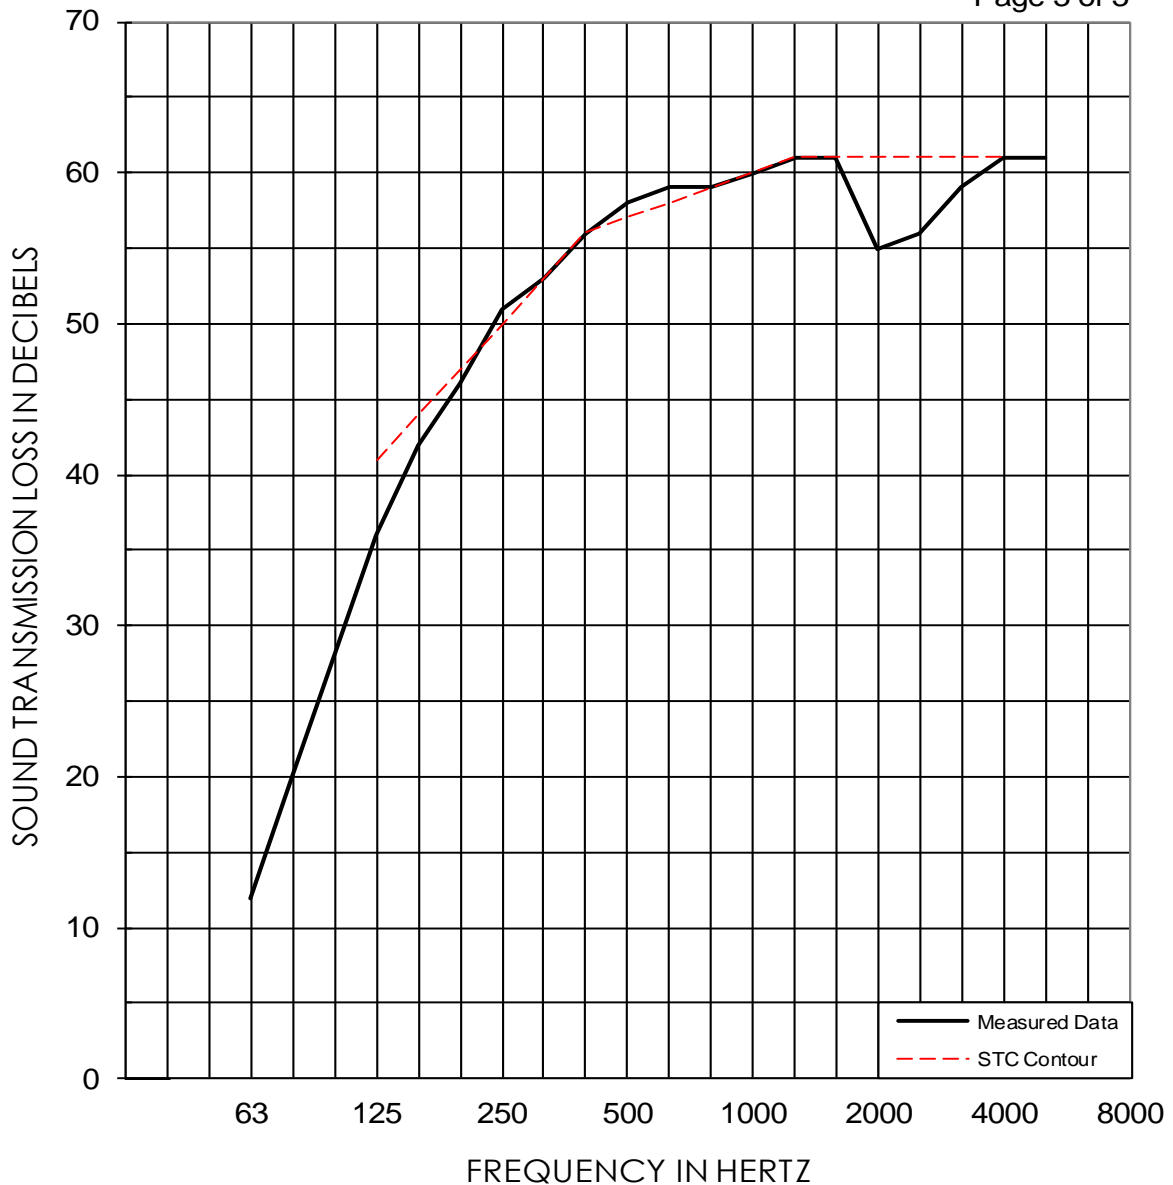

1/3 OCT BAND CNTR FREQ	63	80	100	125	160	200	250	315	400	500
TL in dB	12	20	28	36	42	46	51	53	56	58
95% Confidence in dB deficiencies	1.42	1.92	2.07	1.47	0.89	0.76	0.80	0.52	0.36	0.38
				(5)	(2)	(1)		(0)	(0)	
1/3 OCT BAND CNTR FREQ	630	800	1000	1250	1600	2000	2500	3150	4000	5000
TL in dB	59	59	60	61	61	55	56	59	61	61
95% Confidence in dB deficiencies	0.29	0.44	0.38	0.39	0.36	0.56	0.55	0.31	0.32	0.50
		(0)	(0)	(0)	(0)	(6)	(5)	(2)	(0)	

EWR	OITC	Test Date: 29 April 2014								STC
58	38	Specimen Area: 64 sq.ft.								57
		Temperature: 72.5 deg. F								(21)
		Relative Humidity: 35 %								

Report must be distributed in its entirety except with written permission from Western Electro-Acoustic Laboratory



NVLAP LAB CODE 100256-0