



Expanding Your Solutions


Corporate Headquarters
 13191 Crossroads Pkwy N., Ste 325
 City of Industry, CA 91746
 Phone: 800.775.2362
 Fax: 626.330.7598

Manufacturing Facilities
 City of Industry, CA
 Denver, CO
 Ft. Worth, TX
 Pittsburg, CA

Structural Engineering/Design
 1001-A Pittsburgh Antioch Hwy
 Pittsburg, CA 94565
 Phone: 800.775.2362
 Fax: 626.330.7598

Technical Services
 13191 Crossroads Pkwy N., Ste 325
 City of Industry, CA 91746
 Phone: 800.416.2278
 Fax: 626.249.5004

CORNERITE

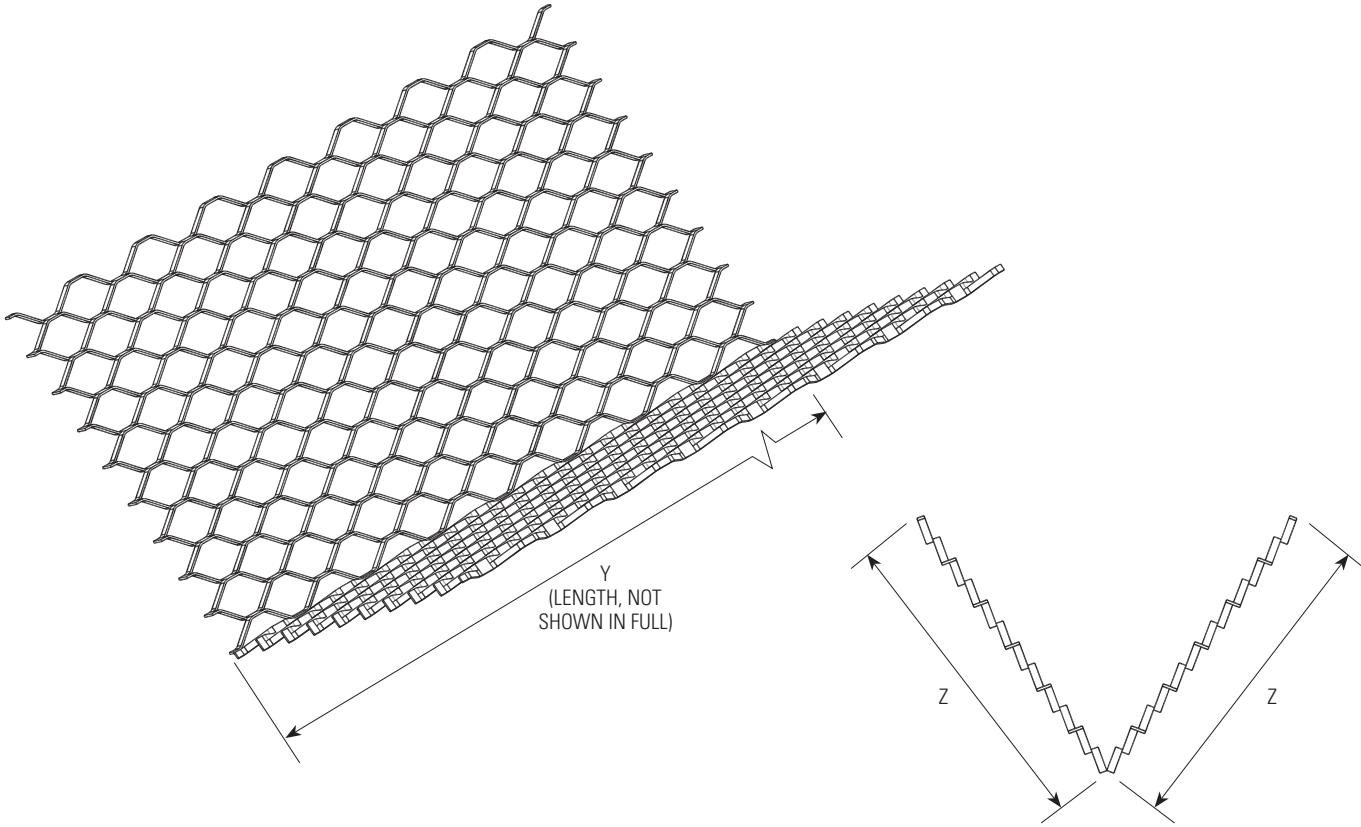

Properties

CEMCO's Cornerite is a smooth edge expanded metal lath corner reinforcement formed at a 105° angle to ensure a snug fit. This product also easily flattens for general patching. Cornerite is fabricated from 26 gauge galvanized steel in standard G60 coating. G90 coating is available upon request.

Packaging

Size (Z x Z x Y)	Weight / 1000'	Feet / Carton	Pieces / Carton	Carton / Pallet
2" x 2" x 4'	70 lbs.	500'	125	20
2" x 2" x 8'	70 lbs.	600'	75	18
3" x 3" x 4'	105 lbs.	300'	75	18
3" x 3" x 8'	105 lbs.	600'	75	18

ASTM & Code Standards:

- ASTM A653
- ASTM A924
- ASTM C840
- ASTM C1063
- IBC: 2012, 2015, 2018
- CBC: 2013, 2016
- AISI: S100-07, S100-12, S100-16, S220-11, S220-15

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

LEED Points and Recycled Content:

By using CEMCO steel framing products, your project can contribute to earning points for:

- LEED MR 2.1 & 2.2 – Construction Waste Management: up to 2 points
- LEED MR 4.1 & 4.2 – Recycled Content: up to 2 points
- LEED MR 5.1 & 5.2 – Regional Materials

Technical Services

Technical Services: 800.416.2278
 Structural Engineering/Design: 925.473.9340
 www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective December 21, 2018.

12-21-18 AT