



Expanding Your Solutions

**Corporate Headquarters**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.775.2362  
Fax: 626.330.7598

**Manufacturing Facilities**  
City of Industry, CA  
Denver, CO  
Ft. Worth, TX  
Pittsburg, CA

**Structural Engineering/Design**  
1001-A Pittsburgh Antioch Hwy  
Pittsburg, CA 94565  
Phone: 800.775.2362  
Fax: 626.330.7598

**Technical Services**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.416.2278  
Fax: 626.249.5004

## SELF-FURRED METAL LATH (GROOVED) WITH "D" PAPER


### Introduction

CEMCO's Self-Furred Diamond Metal Lath "Grooved" is manufactured with 5 "V"-grooves in the lath in lieu of standard "dimples." These 5 grooves provide the necessary 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls. This lath is available with Grade D asphalt paper backing. A saturated black asphalt paper complying with Federal Spec. No. UUB-790A Style 2 Grade D. Manufactured with a 3" lap for weathered application. All CEMCO expanded metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request.

### Packaging

Weight per Square Yard (lb/yd <sup>2</sup> )	Sheet Size	Pieces per bundle	Yards per Pallet
2.5	27.375" x 97"	10	500
3.4	27.375" x 97"	10	500

Note: 25 bundles per pallet.

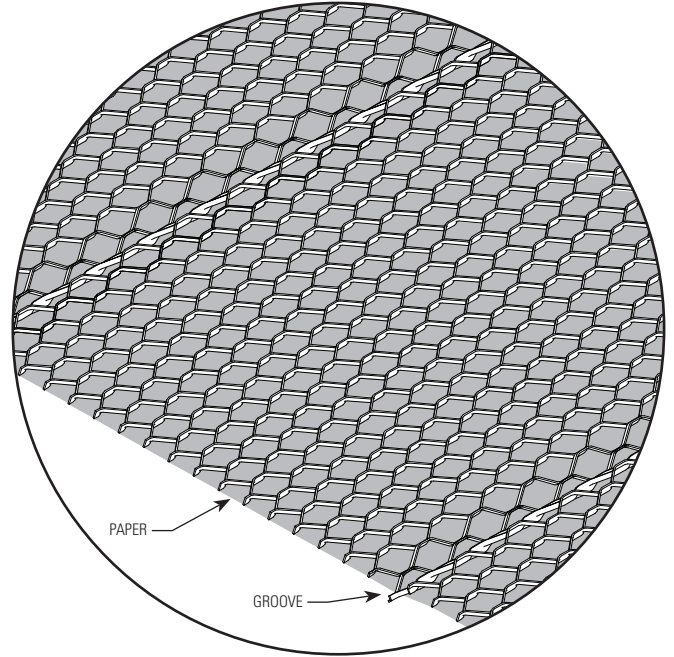

### ASTM's & Code Standards


- ASTM A653
- ASTM C841 (Installation)
- ASTM C847
- ASTM A924
- ASTM C1063 (Installation)
- ICC ESR-1623; 2021, 2018 and 2015 IBC/IRC; 2022 and 2019 CBC/CRC
- Fed. Spec. QQ-1-101C and UUB-790A Style 2 Grade D (D-Paper only)
- ANSI A42.3, ANSI A42.4
- U.S. HUD 4930.1

### LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

### CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

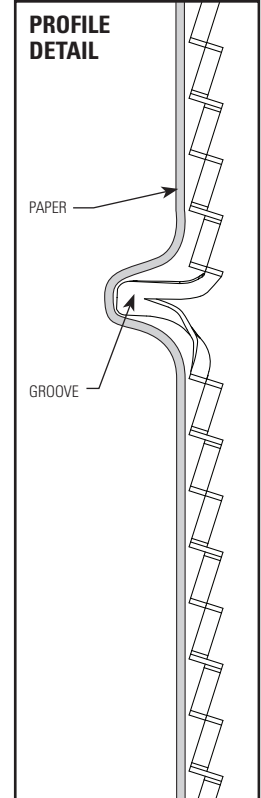

### Technical Services

Technical Services: 800.416.2278  
Structural Engineering/Design: 925.473.9340  
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective November 30, 2023.

11-30-23 AT