



Expanding Your Solutions

800.775.2362 | www.cemcosteel.com

Structural Engineering/Design: 925.473.9340

Technical Services: 800.416.2278

FAS[®]-093X[™]-V (VINYL) FIRE RATED CONTROL JOINT

Product Description

CEMCO FAS-093X-V is an extruded flexible PVC control joint with an integrated intumescent strip that provides fire, smoke, and sound rated solutions in vertical and horizontal control joints.



- Can be used in INTERIOR or EXTERIOR drywall partitions.
- Has integrated mud legs for attachment and adhesion of joint compounds.
- Provides an aesthetically pleasing reveal with integrated groove.
- Installs fully cured, unaffected by water/moisture/temperature.
- Easily installs using spray adhesive and staples.
- Pink in color for identification in the inspection process.
- Does not require drywall rips, fire sealant or mineral wool backing within the wall cavity.
- Removable tabs to protect the groove during installation.
- Can be used in metal or wood stud wall assemblies.
- Provides 1 and 2 hour fire rating from the same profile.
- Paintable.

Ordering / Packaging


Description	Part #	Length	Pcs/Ctn	Submitted for Review/Use	✓
FAS-093X-V	093XV	10'	20	093X-V	

Storage / Warranty

- When stored indoors and kept dry in the original package, FAS-093X-V will provide unlimited shelf life.
- Sustainable Building Life-Cycle Warranty – see CEMCO Firestop Product Warranty for details.

ASTM & Code Standards

- ASTM C1047-99
- ASTM D1784-03
- ASTM D3678-97
- ASTM E-84
- ASTM E90
- ASTM E-119
- ASTM E-1966
- UL 263
- UL 723
- UL 2079 5th Edition
- L-Rating (air leakage) testing for compliance with International Building Code (IBC) and Canadian Building Code (CBC).
- UL listings/approvals include: HW-D-0596; HW-D-0621; WW-D-0172
- U.S. Patent No. 8,671,632**

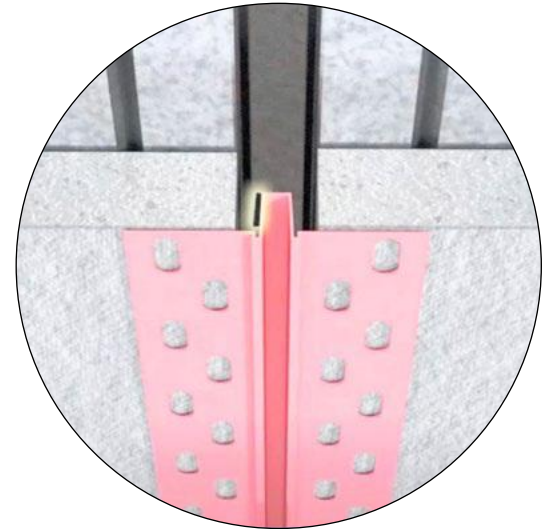

Please refer to www.cemcosteel.com for [UL Fire Rated Assemblies](#) and [Sound Test Reports](#).



This technical information reflects the most current information available and supersedes any and all previous publications effective January 24, 2024.

01-24-24 AT







Expanding Your Solutions

800.775.2362 | www.cemcosteel.com

Structural Engineering/Design: 925.473.9340

Technical Services: 800.416.2278

FAS[®]-093X[™]-V (VINYL) FIRE RATED CONTROL JOINT

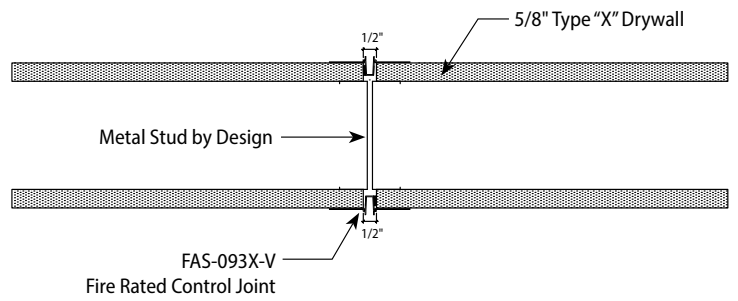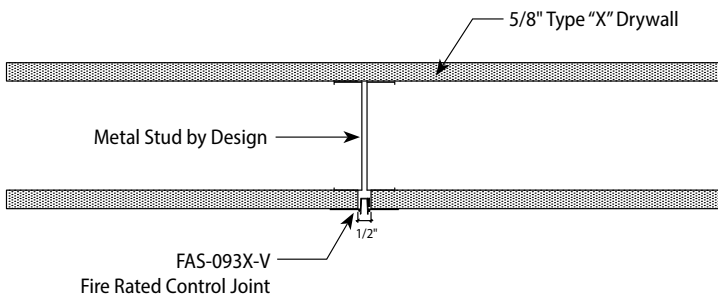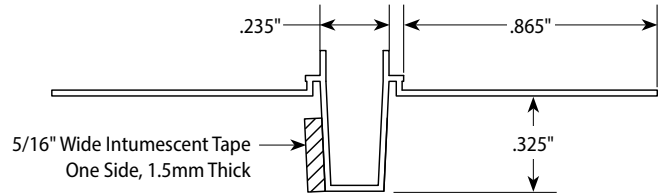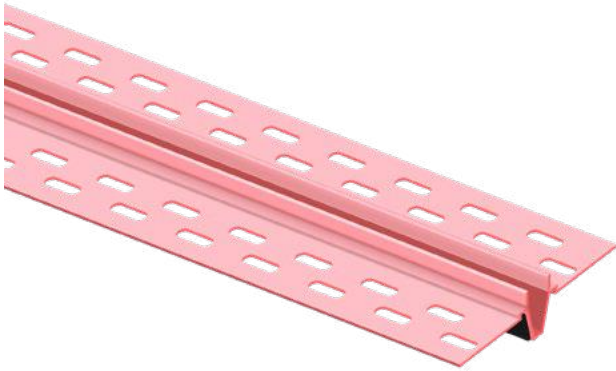

UL Systems available allowing installation on both or one-side of wall assembly. Consult UL System for details.



← View the installation video!

Please refer to www.cemcosteel.com for [UL Fire Rated Assemblies](#) and [Sound Test Reports](#).



This technical information reflects the most current information available and supersedes any and all previous publications effective January 24, 2024.

01-24-24 AT