



Expanding Your Solutions

**Corporate Headquarters**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.775.2362  
Fax: 626.330.7598  
www.cemcosteel.com

**Manufacturing Facilities**  
City of Industry, CA  
Ft. Worth, TX  
Henderson, CO  
Pittsburg, CA

**Structural Engineering/Design**  
1001-A Pittsburgh Antioch Hwy  
Pittsburg, CA 94565  
Phone: 800.775.2362  
Fax: 626.330.7598  
www.cemcoengineering.com

**Technical Services**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.416.2278  
Fax: 626.249.5004

## 600VT125-30 VIPERTRACK

### Geometric Properties

6" X 1-1/4" flange 30 mil ViperTracks are manufactured from standard G40 hot-dipped galvanized steel. G60 and G90 coatings are available through special order, and may require up-charges and extended lead times.

### Steel Thickness

| Model No.   | Design Thickness (in) | Minimum Thickness (in) | Yield (ksi) | Web Depth (W) (in) | Coating <sup>4</sup> | Flange (in) |
|-------------|-----------------------|------------------------|-------------|--------------------|----------------------|-------------|
| 600VT125-30 | 0.0312                | 0.0296                 | 33          | 6                  | G40                  | 1-1/4       |

**Notes:**

1. Uncoated steel thickness. Thickness is for carbon sheet steel.
2. Minimum thickness represents 95% of the design thickness and is the minimum acceptable thickness.
3. Per ASTM C645 & A1003.
4. G60 and G90 available upon request. Will require extended lead time and upcharge.

**Color Code (painted on ends):** 30 mil: Pink

### ASTM & Code Standards:


- ASTM A653/A653M, A924/A924M, A1003/1003, C645 & C754
- ICC-ES & SFIA Code Compliance Certification Program
- ICC ESR-2620
- IBC: 2015, 2018, 2021
- ATI CCRR-0154
- CBC: 2016, 2019, 2022
- AISI: S100, S220

### LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

### CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

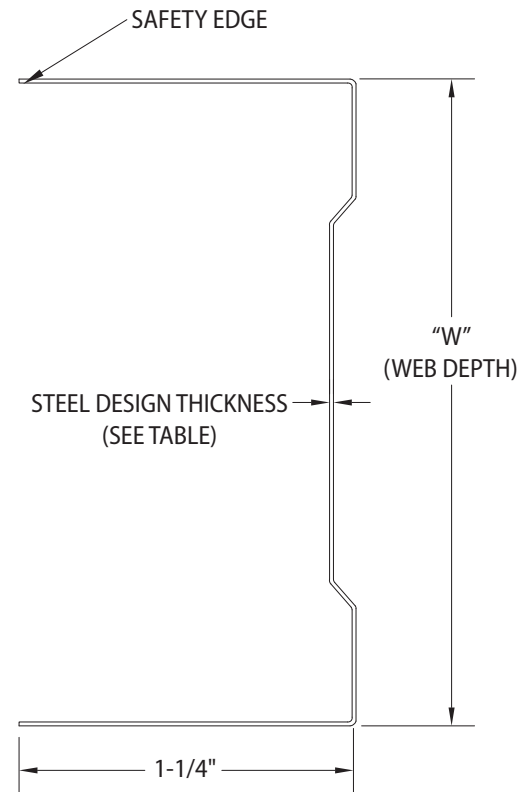

### Interior Non-Load Bearing Track Section Properties

| Member      | Leg Size (in) | Gross Properties |             |          |             |                         |                                   |                                   |                     |                                   |                                   |                     | Effective Properties               |                                    |           | Torsional Properties |                                      |                     |                     |       |
|-------------|---------------|------------------|-------------|----------|-------------|-------------------------|-----------------------------------|-----------------------------------|---------------------|-----------------------------------|-----------------------------------|---------------------|------------------------------------|------------------------------------|-----------|----------------------|--------------------------------------|---------------------|---------------------|-------|
|             |               | Weight (lb/ft)   | Design (in) | Min (in) | Yield (ksi) | Area (in <sup>2</sup> ) | I <sub>x</sub> (in <sup>4</sup> ) | S <sub>x</sub> (in <sup>3</sup> ) | R <sub>x</sub> (in) | I <sub>y</sub> (in <sup>4</sup> ) | S <sub>y</sub> (in <sup>3</sup> ) | R <sub>y</sub> (in) | I <sub>xd</sub> (in <sup>4</sup> ) | S <sub>xe</sub> (in <sup>3</sup> ) | Ma (in-k) | X <sub>o</sub> (in)  | J <sub>x103</sub> (in <sup>4</sup> ) | C <sub>w</sub> (in) | R <sub>o</sub> (in) | β     |
| 600VT125-30 | 1.25          | 0.90             | 0.0312      | 0.0296   | 33          | 0.266                   | 1.300                             | 0.421                             | 2.210               | 0.031                             | 0.0290                            | 0.339               | 1.030                              | 0.250                              | 4.94      | -0.517               | 0.0862                               | 0.216               | 2.29                | 0.949 |

**Notes:**

1. Section properties are in accordance with AISI S100-16/S2-20.
2. Cold-work of forming is not included.
3. The effective moment of inertia for deflection is calculated based on AISI S100-16/S2-20 procedure 1 for serviceability determination.
4. The center line bend radius is greater than 2 times the design thickness or 3/32".
5. Web-to-thickness ratio exceeds 200.
6. Web-to-thickness ratio exceeds 260.
7. Flange-width-to-thickness-ratio exceeds 60, only gross properties will be determined.

Check the updated list of Certified Production Facilities at Intertek's website at <http://www.intertek.com/building/sfia>



This technical information reflects the most current information available and supersedes any and all previous publications effective September 25, 2023.

09-25-23 AT