



Expanding Your Solutions


**Corporate Headquarters**  
 13191 Crossroads Parkway North, Suite 325  
 City of Industry, CA 91746  
 Phone: 800.775.2362  
 Fax: 626.330.7598

**Manufacturing Facilities**  
 City of Industry, CA  
 Denver, CO  
 Ft. Worth, TX  
 Pittsburg, CA

**Structural Engineering/Design**  
 1001-A Pittsburgh Antioch Hwy  
 Pittsburg, CA 94565  
 Phone: 800.775.2362  
 Fax: 626.330.7598

**Technical Services**  
 263 North Covina Lane  
 City of Industry, CA 91744  
 Phone: 800.416.2278  
 Fax: 626.249.5005

## CORNERITE

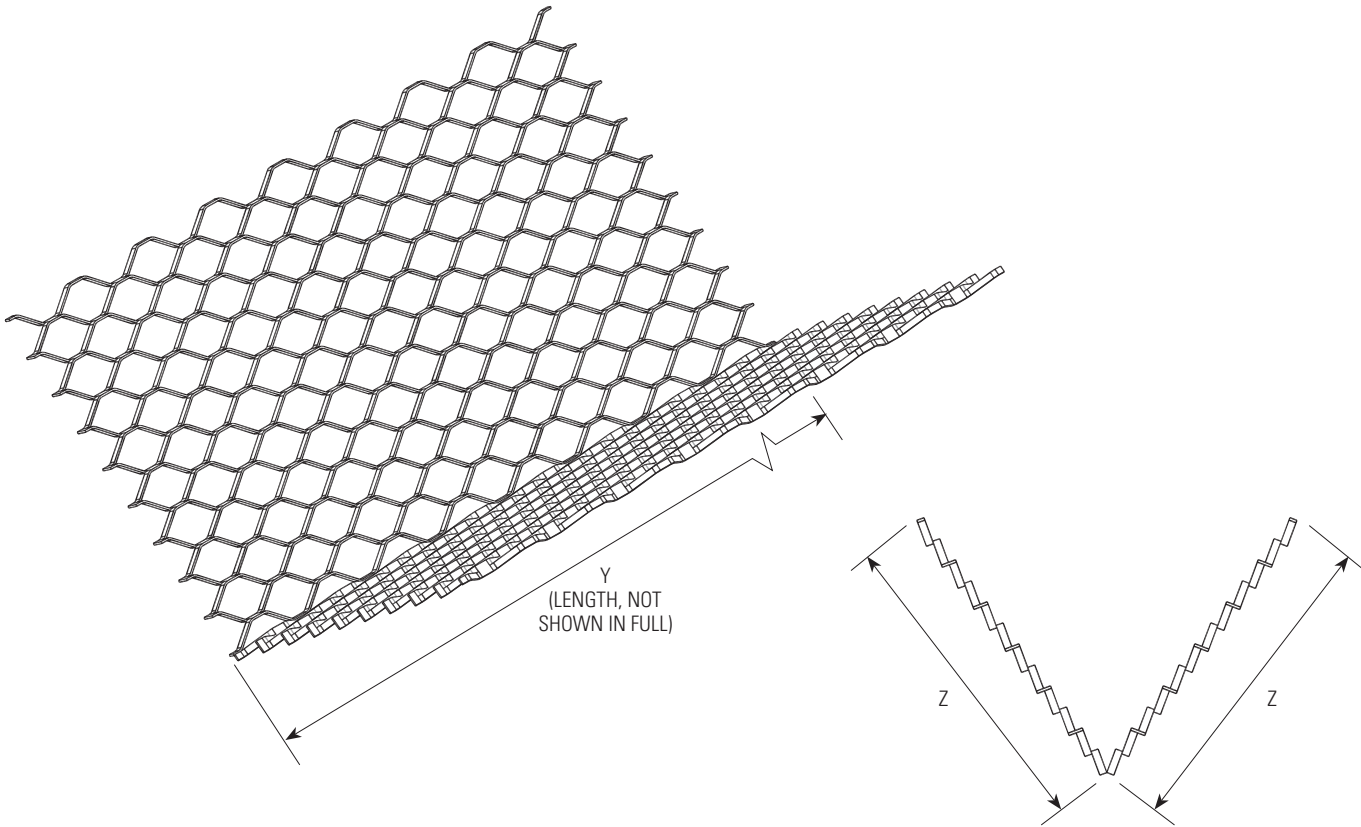

### Properties

CEMCO's Cornerite is a smooth edge expanded metal lath corner reinforcement formed at a 105° angle to ensure a snug fit. This product also easily flattens for general patching. Cornerite is fabricated from 26 gauge galvanized steel in standard G60 coating. G90 coating is available upon request.

### Packaging

Size (Z x Z x Y)	Weight / 1000'	Feet / Carton	Pieces / Carton	Carton / Pallet
2" x 2" x 4'	70 lbs.	500'	125	20
2" x 2" x 8'	70 lbs.	600'	75	18
3" x 3" x 4'	105 lbs.	300'	75	18
3" x 3" x 8'	105 lbs.	600'	75	18

### ASTM & Code Standards:

- ASTM A653
- ASTM A924
- ASTM C840
- ASTM C1063
- 2010/2013 CBC
- 2010/2015 IBC

### CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

### LEED Points and Recycled Content:

By using CEMCO steel framing products, your project can contribute to earning points for:

- LEED MR 2.1 & 2.2 – Construction Waste Management: up to 2 points
- LEED MR 4.1 & 4.2 – Recycled Content: up to 2 points
- LEED MR 5.1 & 5.2 – Regional Materials

### Technical Services

Technical Services: 800.416.2278  
 Structural Engineering/Design: 925.473.9340  
 www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective August 1, 2016.

G054 Rev 3