



Expanding Your Solutions

Corporate Headquarters
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.775.2362
Fax: 626.330.7598
www.cemcosteel.com

Manufacturing Facilities
City of Industry, CA
Denver, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design
1001-A Pittsburgh Antioch Hwy
Pittsburg, CA 94565
Phone: 800.775.2362
Fax: 626.330.7598
www.cemcoengineering.com

Technical Services
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.416.2278
Fax: 626.249.5004

400T125-33 (G60/FW) "T" UN-PUNCHED TRACK (20 Ga. STRUCTURAL FLAT WEB)

Geometric Properties

"T" tracks are fabricated in 33-mil thick galvanized steel in standard CP60 coating weight. CP90 is available upon special request, and may require up-charges and extended lead times.

Physical Properties

Model No.	Design Thickness (in)	Minimum Thickness (in)	Yield (ksi)	Coating ^{3,4}	Web Depth (in)	Leg Size (in)
400T125-33 (G60/FW)	0.0346	0.0329	33	CP60	4	1-1/4

Notes:

- Uncoated steel thickness. Thickness is for carbon sheet steel.
- Minimum thickness represents 95% of the design thickness and is the minimum acceptable thickness.
- Per ASTM C955 & A1003, Table 1.
- CP90 available upon request. Will require extended lead time and upcharge.

Color Code (painted on ends): 33-mil: White

ASTM & Code Standards:

- ASTM A653/A653M, A924/A924M, A1003/1003, C955 & C1007
- ICC-ES & SFIA Code Compliance Certification Program
- ICC ESR-3016
- ATI CCRR-0224
- IBC: 2012, 2015, 2018, 2021
- CBC: 2013, 2016, 2019, 2022
- AISI: S100, S200, S240


LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

CSI Division: 05.40.00 – Cold-Formed Metal Framing

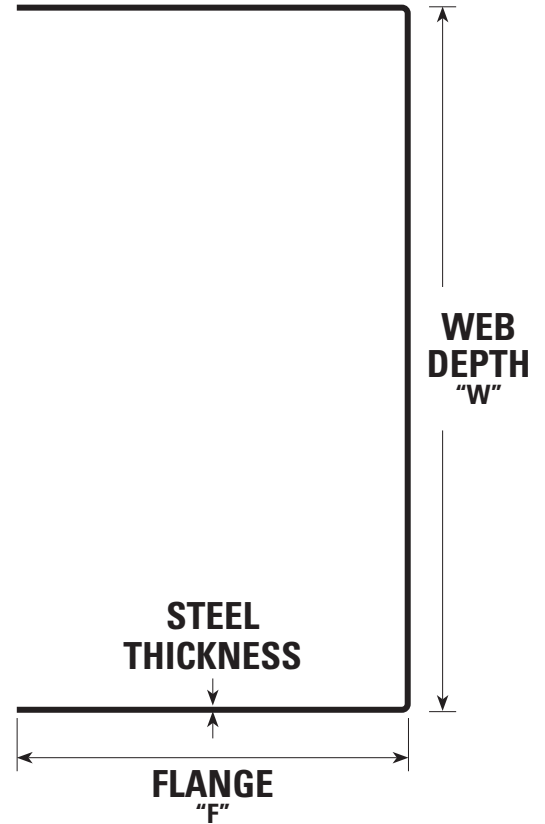

400T125-33 (G60/FW) Track Properties³

Design Thickness (in.)	F _y (ksi)	Gross ²					Effective Properties				Torsional Properties					
		I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	V _{ag} (lb)	J _{x1000} (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β
0.0346	33	0.549	0.265	1.563	0.031	0.371	0.484	0.201	3.97	940	0.090	0.095	-0.630	0.396	1.725	0.867

Notes: 1. Web-height to thickness ratio, h/t, exceeds 200. Web Stiffeners designed in accordance with AISI are required at support points and concentrated loads. 2. Gross properties are based on the full, unreduced cross-section. 3. Use the effective moment of inertia for deflection calculation.

Check the updated list of Certified Production Facilities at Intertek's website at <http://www.intertek.com/building/sfia>



This technical information reflects the most current information available and supersedes any and all previous publications effective February 20, 2024.

02-20-24 AT