



Expanding Your Solutions

**Corporate Headquarters**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.775.2362  
Fax: 626.330.7598  
www.cemcosteel.com

**Manufacturing Facilities**  
City of Industry, CA  
Denver, CO  
Ft. Worth, TX  
Pittsburg, CA

**Structural Engineering/Design**  
1001-A Pittsburgh Antioch Hwy  
Pittsburg, CA 94565  
Phone: 800.775.2362  
Fax: 626.330.7598  
www.cemcoengineering.com

**Technical Services**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.416.2278  
Fax: 626.249.5004

## 600VT125-18 (25 GA.) 33 KSI VIPERTRACK (SELECT MARKETS ONLY)

### Geometric Properties

6" x 1-1/4" flange, 18 mil 33 ksi ViperTracks are manufactured from G40 hot-dipped galvanized steel. G60 and G90 coating is available through special order, and may require up-charges and extended lead times.

### Steel Thickness

Model No.	Design Thickness (in)	Minimum Thickness (in)	Yield (ksi)	"W" Web Depth (in)	Coating <sup>4</sup>	Flange (in)
600VT125-18 (25 ga.)	0.0188	0.0179	33	6	G40	1-1/4

**Notes:**

1. Uncoated steel thickness. Thickness is for carbon sheet steel.
2. Minimum thickness represents 95% of the design thickness and is the minimum acceptable thickness.
3. Per ASTM C645 & A1003.
4. G60 & G90 available upon request. Will require extended lead time and upcharge.

**Color Code (painted on ends):** 18 mil: None

### ASTM & Code Standards:


- ASTM A653/A653M, A924/A924M, A1003/1003, C645 & C754
- ICC-ES & SFIA Code Compliance Certification Program
- ICC ESR-2620
- IBC: 2012, 2015, 2018, 2021
- ATI CCRR-0154
- CBC: 2013, 2016, 2019
- AISI: S100, S220

### LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

### CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

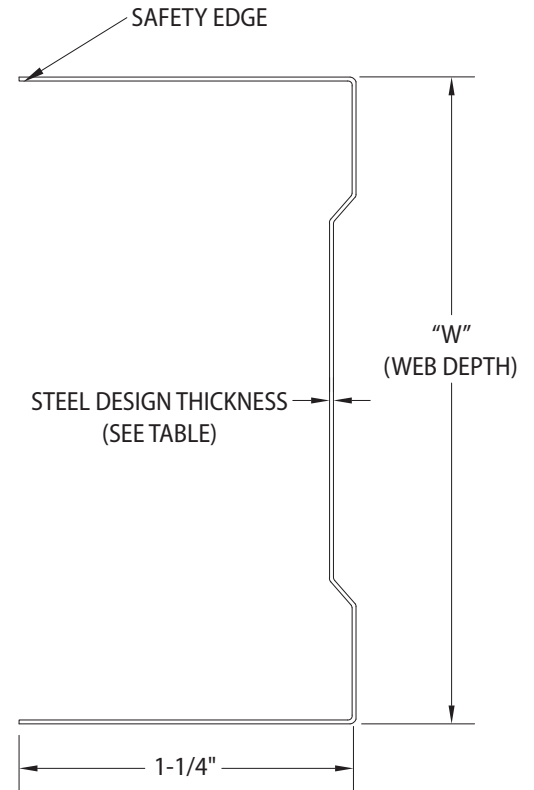

### Interior Non-Load Bearing Track Section Properties

Member	Leg Size (in)	Gross Properties											Effective Properties			Torsional Properties				
		Weight (lb/ft)	Design (in)	Min (in)	Yield (ksi)	Area (in <sup>2</sup> )	I <sub>x</sub> (in <sup>4</sup> )	S <sub>x</sub> (in <sup>3</sup> )	R <sub>x</sub> (in)	I <sub>y</sub> (in <sup>4</sup> )	S <sub>y</sub> (in <sup>3</sup> )	R <sub>y</sub> (in)	I <sub>xd</sub> (in <sup>4</sup> )	S <sub>xe</sub> (in <sup>3</sup> )	Ma (in-k)	X <sub>o</sub> (in)	J <sub>x103</sub> (in <sup>4</sup> )	C <sub>w</sub> (in)	R <sub>o</sub> (in)	β
600VT125-18 <sup>5,6</sup> (25 ga.)	1.25	0.5442	0.0188	0.0179	33	0.1599	0.7794	0.2538	2.2076	0.0187	0.0176	0.3417	--	--	--	-0.521	0.0188	0.1320	2.294	0.948

**Notes:**

1. Section properties are in accordance with AISI S100 & S220.
2. Cold-work of forming is not included.
3. The effective moment of inertia for deflection is calculated based on AISI S100 & S220 procedure 1 for serviceability determination.
4. The center line bend radius is greater than 2 times the design thickness or 3/32".
5. Web depth-to-thickness ratio exceeds 260.
6. Flange width-to-thickness ratio exceeds 60.

Check the updated list of Certified Production Facilities at Intertek's website at <http://www.intertek.com/building/sfia>



This technical information reflects the most current information available and supersedes any and all previous publications effective October 10, 2022.

10-10-22 AT